

8x8 4K HDMI Matrix Switch

VM0808HA

- The ATEN VM0808HA 8x8 4K HDMI Matrix Switch supports 4K resolutions of UHD (3840 x 2160) and DCI (4096 x 2160) with refresh rates of 30 Hz (4:4:4) and 60 Hz (4:2:0). Ready for the future of high-definition video switching, the VM0808HA is ideal for applications where the routing of 4K digital signals is required, such as in classrooms, auditoriums, department stores and more.


The VM0808HA matrix switch offers an easy and affordable way to route any of 8 HDMI video sources to any of 8 HDMI displays and can be operated through front-panel pushbuttons, IR remote, RS-232 control and Ethernet connections, ensuring optimum viewing and control of high-definition video. Moreover, with a built-in Web GUI, the VM0808HA is easily accessible via any web browser for remote configuration and customization of each HDMI source and display connection.




Front view



Rear view

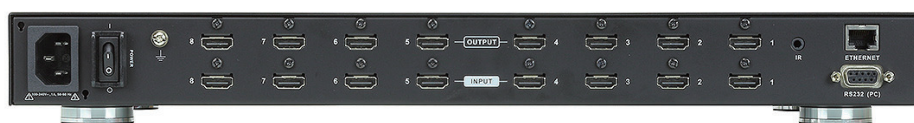

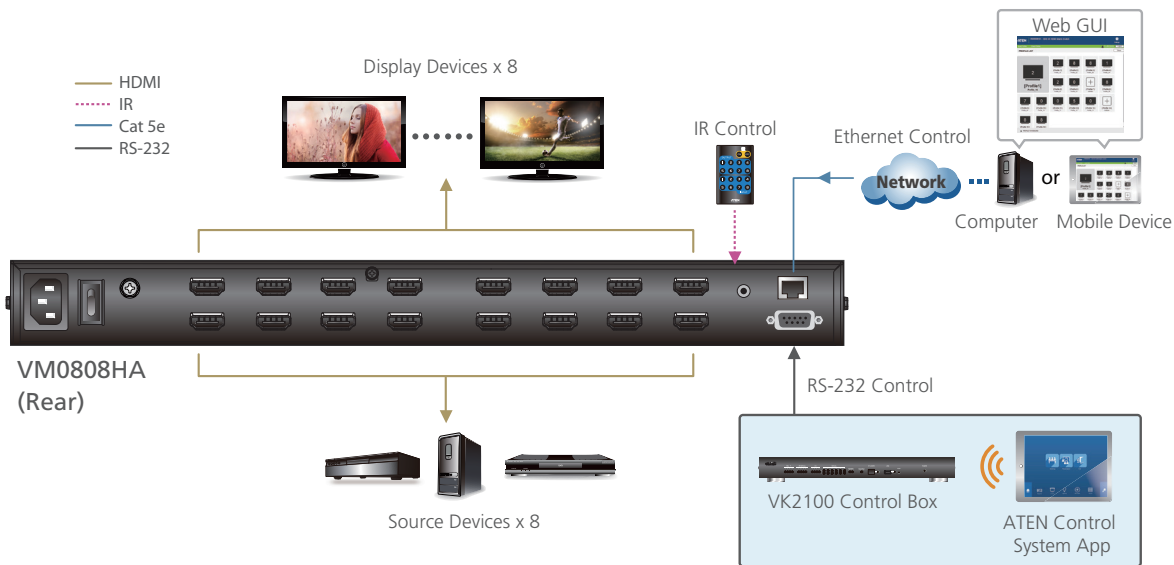

Features

- Connects any of 8 HDMI sources to any of 8 HDMI displays
- Supports 4K resolutions up to UHD (3840 x 2160) and DCI (4096 x 2160) with refresh rates of 30 Hz (4:4:4) and 60 Hz (4:2:0)
- EDID Expert™ – selects optimum EDID settings for smooth power-up, high-quality display and use of the best video resolution across different screens
- Multiple Control Methods – system management via front-panel pushbuttons, IR remote, RS-232 control, and Ethernet connections (Web GUI)
- Supports Dolby True HD and DTS HD Master audio
- Signaling rates up to 3.4 Gbits for flawless 4K output
- HDMI (3D, Deep Color, 4K) and HDCP 2.2 compatible
- Consumer Electronics Control (CEC) allows interconnected HDMI devices to communicate and respond to a single remote control
- Supports ATEN's LockPro™ HDMI cable lock for secure HDMI cable connections
- ESD protection for HDMI
- Firmware upgradeable
- Rack Mountable (1U design)

Specifications

| Function | VM0808HA |
|----------------------------|--|
| Video Input | |
| Interface | 8 x HDMI Type A Female (Black) |
| Impedance | 100 Ω |
| Max Distance | 5 m |
| Video Output | |
| Interface | 8 x HDMI Type A Female (Black) |
| Impedance | 100 Ω |
| Max Distance | 15 m |
| Video | |
| Max Data Rate | 10.2 Gbps (3.4 Gbps Per Lane) |
| Max Pixel Clock | 340 MHz |
| Compliance | HDMI (3D, Deep Color, 4K) HDCP 2.2 Compatible Consumer Electronics Control (CEC) |
| Max Resolution | Up to 4096 x 2160 / 3840 x 2160 @ 60 Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30 Hz (4:4:4) |
| Max Distance | Up to 15 m |
| Control | |
| RS-232 | Connector: 1 x DB-9 Female (Black) Baud Rate and Protocol: Baud Rate: 19200, Data Bits: 8, Stop Bits: 1, Parity: No, Flow Control: No |
| IR | 1 x Mini Stereo Jack Female (Black) |
| EDID Settings | EDID Mode: Default / Port1 / Remix / Customized |
| Power | |
| Connectors | 1 x 3-Prong AC Socket |
| I/P Rating | 100 - 240 VAC; 50 - 60 Hz; 1.0 A |
| Consumption | 110 VAC, 24 W 220 VAC, 24.4 W |
| Environmental | |
| Operating Temperature | 0° to 40° C |
| Storage Temperature | -20° to 60° C |
| Humidity | 0 - 80% RH, Non-Condensing |
| Physical Properties | |
| Housing | Metal |
| Weight | 3.86 kg |
| Dimensions (L x W x H) | 43.24 x 26.23 x 4.40 cm |

Product information is subject to change without prior notice.

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Publish Date: 08/2020 V2.0



© Copyright 2020 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.