



RENTAL & STAGE

INDOOR & OUTDOOR LED DISPLAY

LR Series

- > Calming appearance, easy to use
- > Curvable design, -10° to 10° can be adjusted
- > Composite installation mode(500x500, 500x1000)
- > 100% Rear Maintenance
- > Module front maintenance, each module has magnetic design making screen seamless
- > Outdoor waterproof products



APPLICATIONS

Conferences, stage show, celebrations, variety shows, product presentation, car exhibition



EASY TO USE



-10° TO 10° CAN BE ADJUSTED



100% REAR MAINTENANCE




CONVENIENT MAINTENANCE



Module front maintenance, each module has magnetic design making screen seamless.



OUTDOOR WATERPROOF

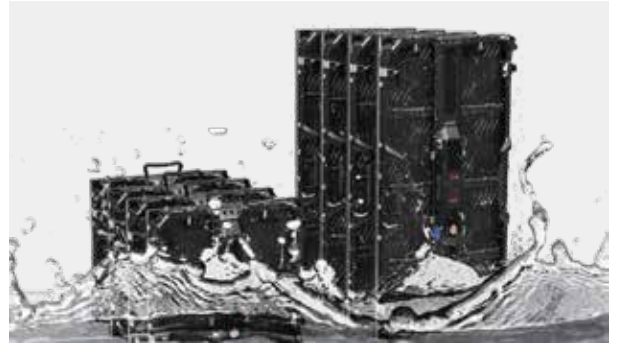


CURVABLE DESIGN

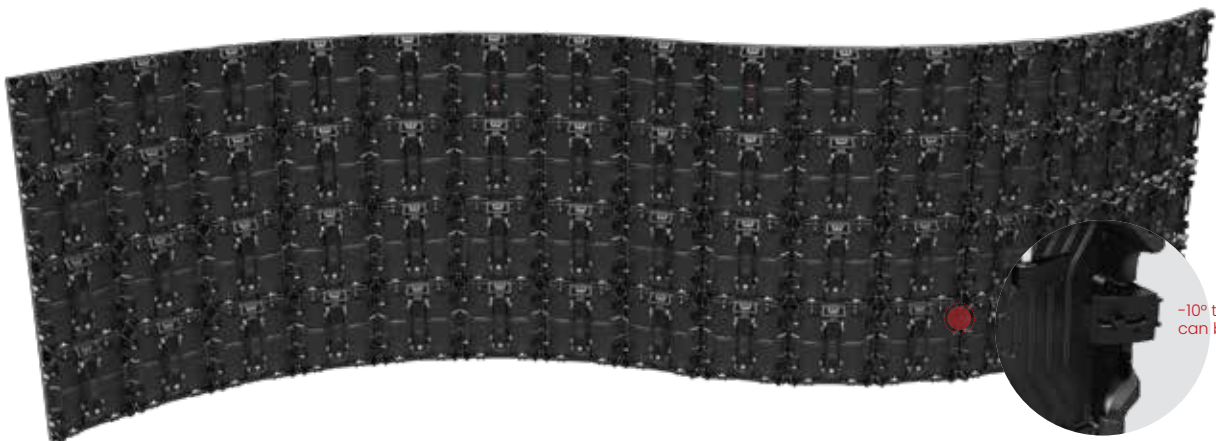

-10° to 10°
can be adjusted

COMPOSITE INSTALLATION MODE

LER Series has two options for cabinet height, by mixing up the cabinets into the screen, the screen heights are in 500mm steps.

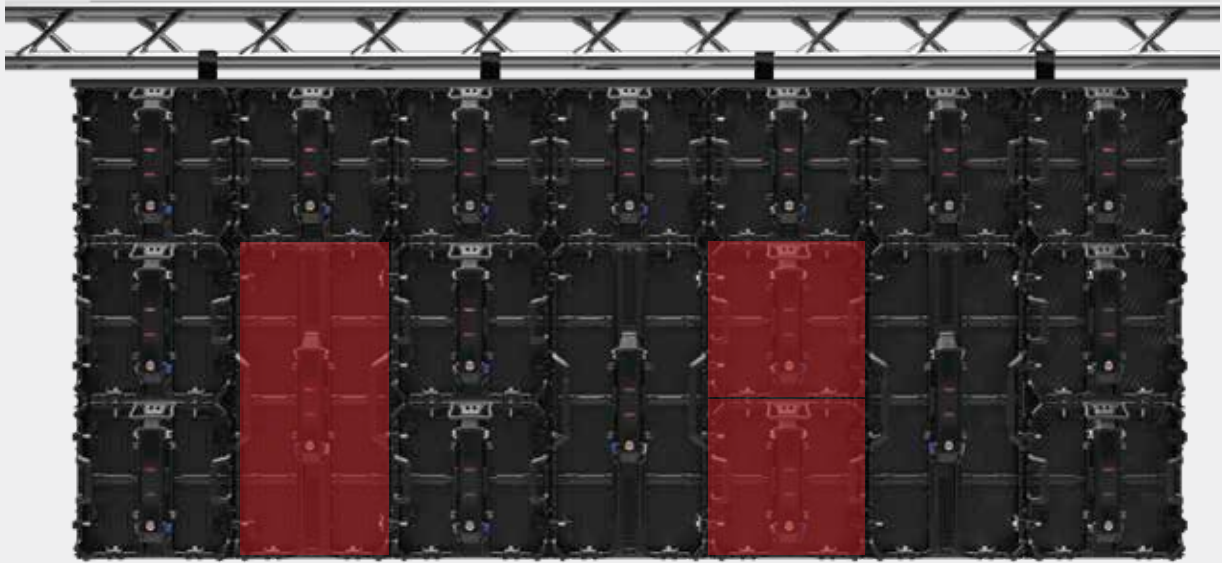

ACCESSORIES



- 1 Video Processor
- 2 Flight Case
- 3 Signal wire / Power line
- 4 Hanger Girder
- 5 Support Frame



SPECIFICATIONS

Item	LR019	LR026	LR029	LR039	LR039S	LR048S
LED Configuration	SMD	SMD	SMD	SMD	SMD	SMD
Pixel Pitch (mm)	1.95	2.6	2.97	3.91	3.91	4.81
LED Density (pixel/m ²)	262144	147456	112896	65536	65536	43264
Cabinet Resolution	256x256	192x192	168x168	128x128 / 128x256	128x128 / 128x256	104x104 / 104x208
Scans	1/32	1/32	1/28	1/16	1/16	1/13
Brightness (nits)	800	800	800	800	4500	4500
Refresh Rate (Hz)	3840	3840	3840	3840	3840	3840
Contrast Ratio	5000:1	5000:1	5000:1	4500:1	5500:1	5500:1
Color Gray Scale (level)	14bit	14bit	14bit	14bit	14bit	14bit
Power Consumption (Max./Avg.)(W/m ²)	650/220	630/210	480/160	480/160	690/230	690/230
Viewing Angle (H/V)(°)	160/160	160/160	160/160	160/160	140/120	140/120
Voltage (V)(50-63Hz)	AC200~240	AC200~240	AC200~240	AC200~240	AC200~240	AC200~240
Panel Dimensions (WxHxD) (mm)	500x500	500x500	500x500	500x500 / 500x1000	500x500 / 500x1000	500x500 / 500x1000
Panel Weight (kg)	7.5	7.5	7.5	7.5/13.5	8/14	8/14
Module Dimensions (mm)	250x250	250x250	250x250	250x250	250x250	250x250
Panel Material	Die-casting aluminum	Die-casting aluminum	Die-casting aluminum	Die-casting aluminum	Die-casting aluminum	Die-casting aluminum
Operating Temperature (°C)	-10 to 40°C	-10 to 40°C	-10 to 40°C	-10 to 40°C	-10 to 40°C	-10 to 40°C
Operating Humidity (RH)	10%~85%	10%~85%	10%~85%	10%~85%	10%~90%	10%~90%
Module Maintenance	Front and Rear	Front and Rear	Front and Rear	Front and Rear	Front and Rear	Front and Rear
PSU & Others Maintenance	Rear	Rear	Rear	Rear	Rear	Rear
IP Rating (Front & Raer)	IP40/IP21	IP40/IP21	IP40/IP21	IP40/IP21	IP65/IP54	IP65/IP54



Israk Solutions Sdn. Bhd (1289622-T)

No. 20, Jalan BP 6/13, Bandar Bukit Puchong, 47120, Puchong, Selangor



<http://www.israk.my>



info@israk.my



03-8966 2405