

## UMini —SERIES—

### Ultra-Mini, Ultra Vision



DCI-P3



28 Trillion + Colors



Maximum Brightness 2000 nits



HDR Processing Technology



Wireless Connection



Front and Rear Maintenance


### APPLICATIONS



Conference



Control Room

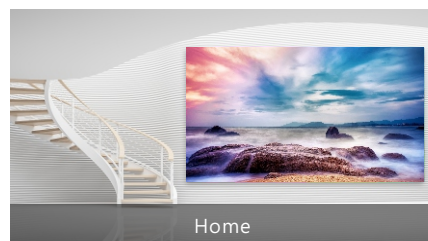

Home



Showroom

### FEATURES

- Ultra contrast of 20,000:1 – to the beauty of the show
- Cinema grade HDR – ultra dazzling color
- Smooth optical system design – comfortable viewing experience
- 180° ultra wide viewing angle – upgrade to life
- Ultra energy management – dynamic energy saving by 40%
- Ultra high lamp surface protection – extended durability

## SPECIFICATIONS

Parameter	Value	
Model	UMini0.9	UMini1.2
Pixel Pitch	0.9375mm	1.25mm
Pixel Density	1,137,778 dots/m <sup>2</sup>	640,000 dots/m <sup>2</sup>
Pixels Per Panel	640 × 360 dots	480 × 270 dots
Material	Die-cast Aluminum	Die-cast Aluminum
Brightness	600 cd/m <sup>2</sup>	600 cd/m <sup>2</sup>
Color Temperature	2,000K - 9,500K Adjustable	2,000K - 9,500K Adjustable
Viewing Angle	180°	180°
Weight	9.2 kg/panel	9.2 kg/panel
Aspect Ratio (W:H)	16:9	16:9
Maintenance	Full Front/Full Rear Maintenance	Full Front/Full Rear Maintenance
Input Power/Panel (Max.)	73 W	61 W
Input Power/Panel (Ave.)	24 W	20 W
Contrast Ratio	≥5,000:1	≥5,000:1
Ingress Protection	Rear - IP50	Rear - IP50
Refresh Rate	3,840 Hz	3,840 Hz
Operating Temperature/Humidity	-10°C to 45°C/10% - 80% RH	-10°C to 45°C/10% - 80% RH
Storage Temperature/Humidity	-20°C to 55°C/10% - 85% RH	-20°C to 55°C/10% - 85% RH

## DIMENSIONS

